


Weld Neck

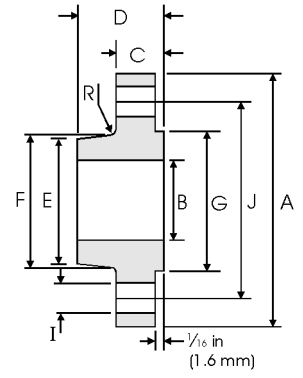

Slip On

**Class 300 lb**

Pipe Nominal Pipe Size	Flange Data				Hub Data			Raised Face	Drilling Data			Radius	Weight
	A	B	C	D	E		F	G	H	I	J	R	
	Overall Diameter	Slip on Inside Diameter	Flange Thickness	WNF / Slip on Overall Length	WNF Diam. at Weld Bevel	Slip on Hub Diam. at Small End	Hub Diameter	Face Diameter	Number of Holes	Bolt Hole Diam.	Diameter of Circle of Holes	Fillet	kg/ piece
in mm	in mm	in mm	in mm	in mm	in mm	in mm	in mm	in mm		in mm	in mm	in mm	WNF Slip On
26	38 <sup>1</sup> / <sub>4</sub> 971.5	26 <sup>1</sup> / <sub>4</sub> 666.7	3 <sup>1</sup> / <sub>8</sub> 79.4	7 <sup>1</sup> / <sub>4</sub> 184.1	26 <sup>1</sup> / <sub>4</sub> 666.7	27 <sup>1</sup> / <sub>16</sub> 687.4	28 <sup>3</sup> / <sub>8</sub> 720.7	29 <sup>1</sup> / <sub>2</sub> 749.3	28	1 <sup>3</sup> / <sub>4</sub> 44.4	34 <sup>1</sup> / <sub>2</sub> 876.3	<sup>3</sup> / <sub>8</sub> 9.53	279 251
28	40 <sup>3</sup> / <sub>4</sub> 1035.0	28 <sup>1</sup> / <sub>4</sub> 717.6	3 <sup>3</sup> / <sub>8</sub> 85.7	7 <sup>3</sup> / <sub>4</sub> 196.8	28 <sup>1</sup> / <sub>4</sub> 717.5	29 <sup>1</sup> / <sub>8</sub> 739.7	30 <sup>1</sup> / <sub>2</sub> 774.7	31 <sup>1</sup> / <sub>2</sub> 800.1		28	1 <sup>3</sup> / <sub>4</sub> 44.4	37 939.8	<sup>7</sup> / <sub>16</sub> 11.11
30	43 1092.2	30 <sup>1</sup> / <sub>4</sub> 768.3	3 <sup>5</sup> / <sub>8</sub> 92.1	8 <sup>1</sup> / <sub>4</sub> 209.5	30 <sup>1</sup> / <sub>4</sub> 768.3	31 <sup>3</sup> / <sub>16</sub> 792.2	32 <sup>9</sup> / <sub>16</sub> 827.2	33 <sup>3</sup> / <sub>4</sub> 857.2	28		1 <sup>7</sup> / <sub>8</sub> 47.6	39 <sup>1</sup> / <sub>4</sub> 996.9	<sup>7</sup> / <sub>16</sub> 11.11
32	45 <sup>1</sup> / <sub>4</sub> 1149.3	32 <sup>1</sup> / <sub>4</sub> 819.1	3 <sup>7</sup> / <sub>8</sub> 98.4	8 <sup>3</sup> / <sub>4</sub> 222.2	32 <sup>1</sup> / <sub>4</sub> 819.1	33 <sup>1</sup> / <sub>4</sub> 844.6	34 <sup>11</sup> / <sub>16</sub> 881.1	36 914.4		28	2 50.8	41 <sup>1</sup> / <sub>2</sub> 1054.1	<sup>7</sup> / <sub>16</sub> 11.11
34	47 <sup>1</sup> / <sub>2</sub> 1206.5	34 <sup>1</sup> / <sub>4</sub> 869.9	4 101.6	9 <sup>1</sup> / <sub>8</sub> 231.8	34 <sup>5</sup> / <sub>16</sub> 871.5	35 <sup>5</sup> / <sub>16</sub> 896.9	36 <sup>7</sup> / <sub>8</sub> 936.6	38 965.2	28		2 50.8	43 <sup>1</sup> / <sub>2</sub> 1104.9	<sup>1</sup> / <sub>2</sub> 12.7
36	50 1270.0	36 <sup>1</sup> / <sub>4</sub> 920.7	4 <sup>1</sup> / <sub>8</sub> 104.8	9 <sup>1</sup> / <sub>2</sub> 241.3	36 <sup>5</sup> / <sub>16</sub> 922.3	37 <sup>3</sup> / <sub>8</sub> 949.3	39 990.6	40 <sup>1</sup> / <sub>4</sub> 1022.3		32	2 <sup>1</sup> / <sub>8</sub> 54.0	46 1168.4	<sup>1</sup> / <sub>2</sub> 12.7

Notes

- For weld neck flanges, dimension B is to be specified by the purchaser. It corresponds to the pipe inside diameter.
- For slip on flanges, the hub may be cylindrical or have a draft of  $\leq 7^\circ$  on the outside surface.
- WNF = Weld Neck Flange.
- Weights are based on manufacturer's data and are approximate.